






How to arm/disarm your site with the Sirix Mobile App.

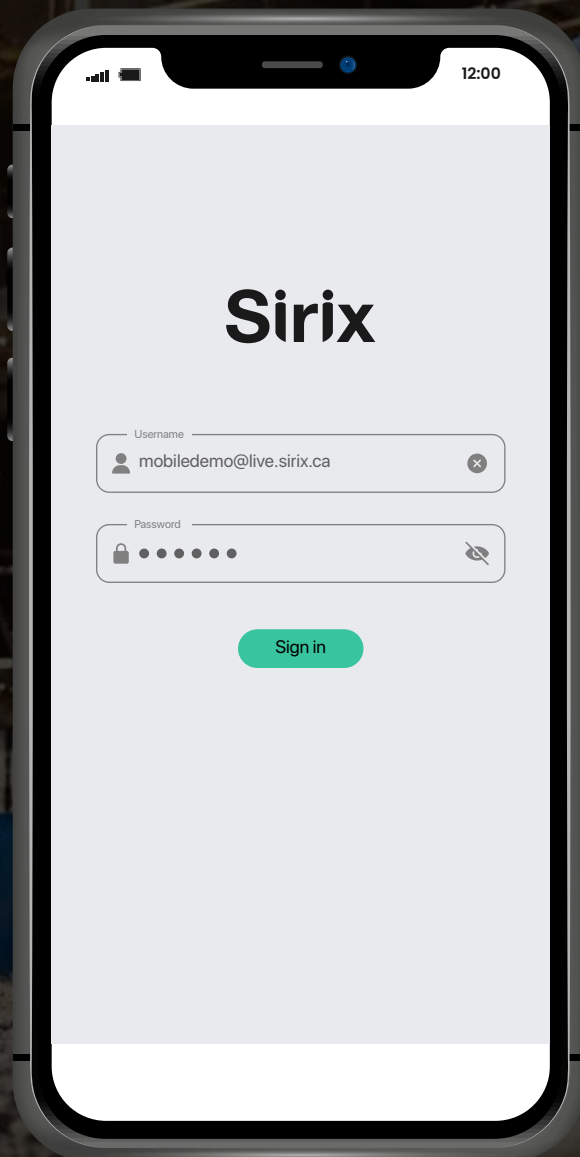


Quickly arm/disarm your site using the Sirix Mobile App. Your step-by-step guide

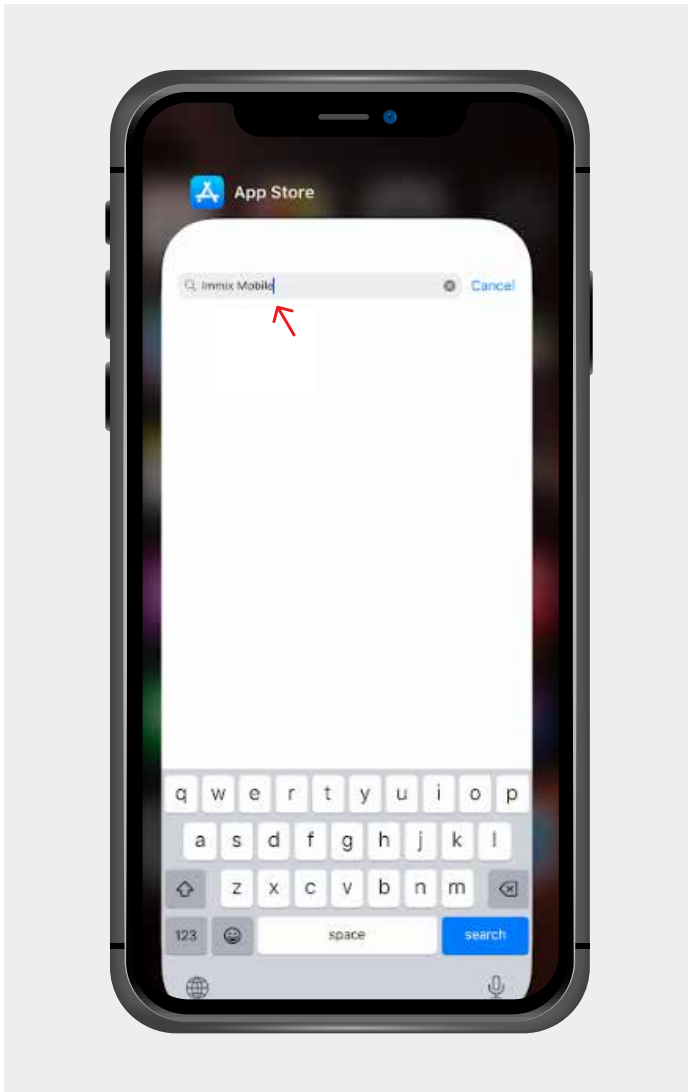

Step 1. On your iOS device, launch the "App Store" app. In the search bar at the top of the screen, enter "Immix Mobile" to find the application.

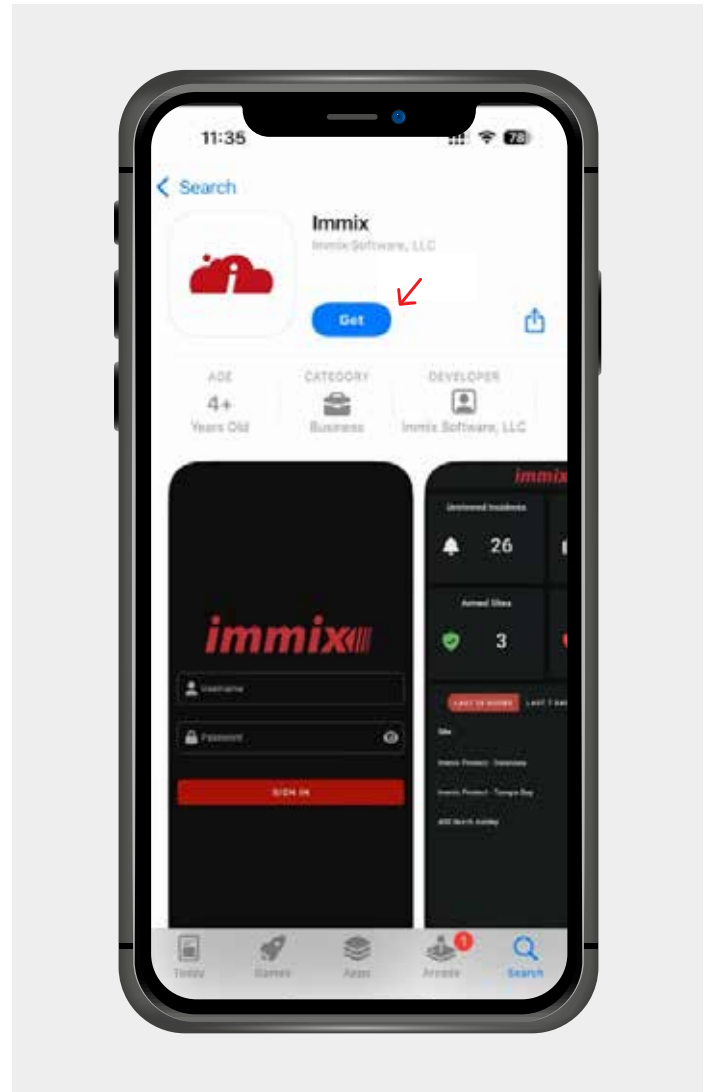

Step 2. Once the search results appear, locate the "Immix Mobile" application. Tap the "GET" button next to it to start the download.

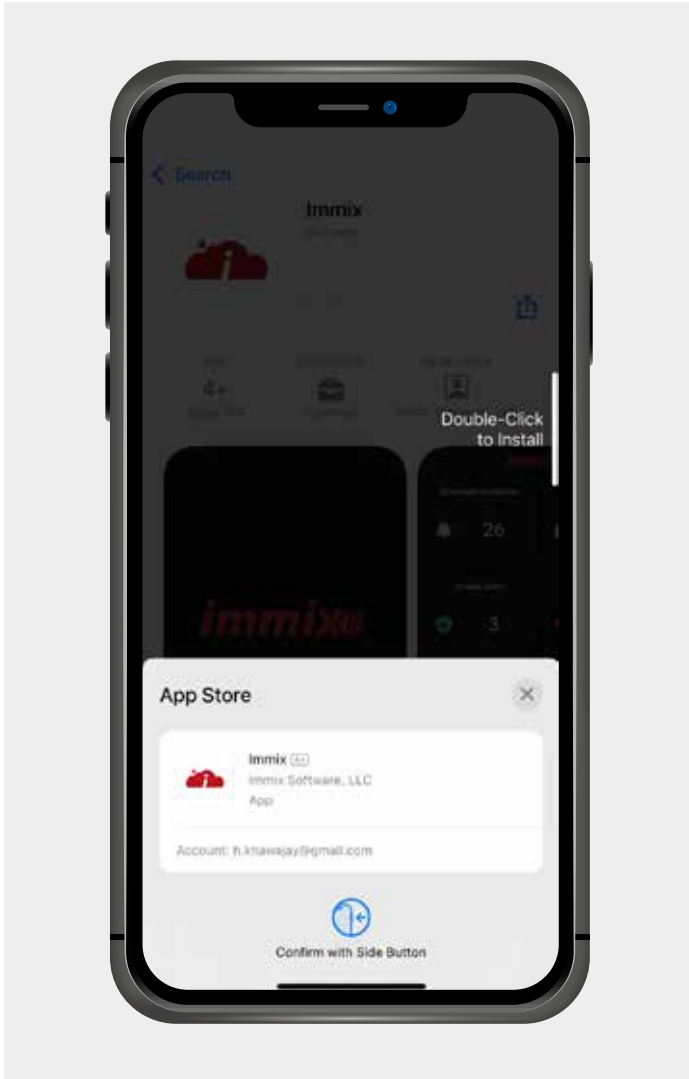


Step 3. When prompted, sign in with your iOS account credentials to download the app.




Step 4. After the app has downloaded, tap on the Immix Mobile icon on your home screen to open it.




Step 5. Enter the username and password you received from Sirix via email in the designated fields to log in.

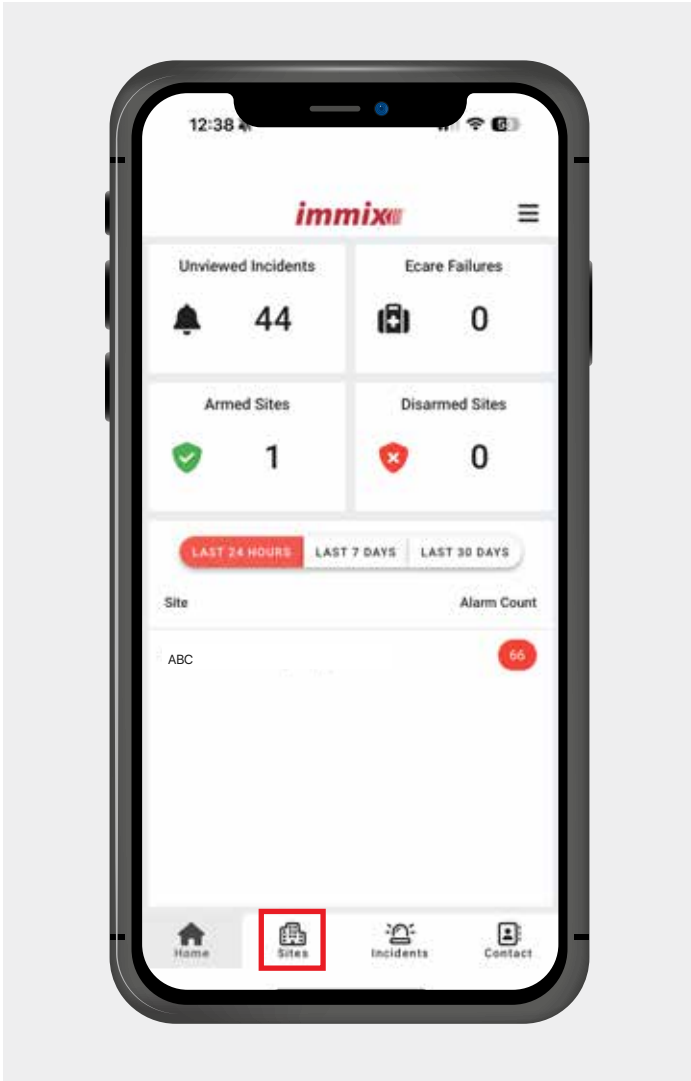


Step 6. On the Home tab, you can view your armed and disarmed sites, as well as the number of unviewed incidents, Ecare failures, and alarm counts for the selected time period. To disarm a site, tap on the "Sites" tab.

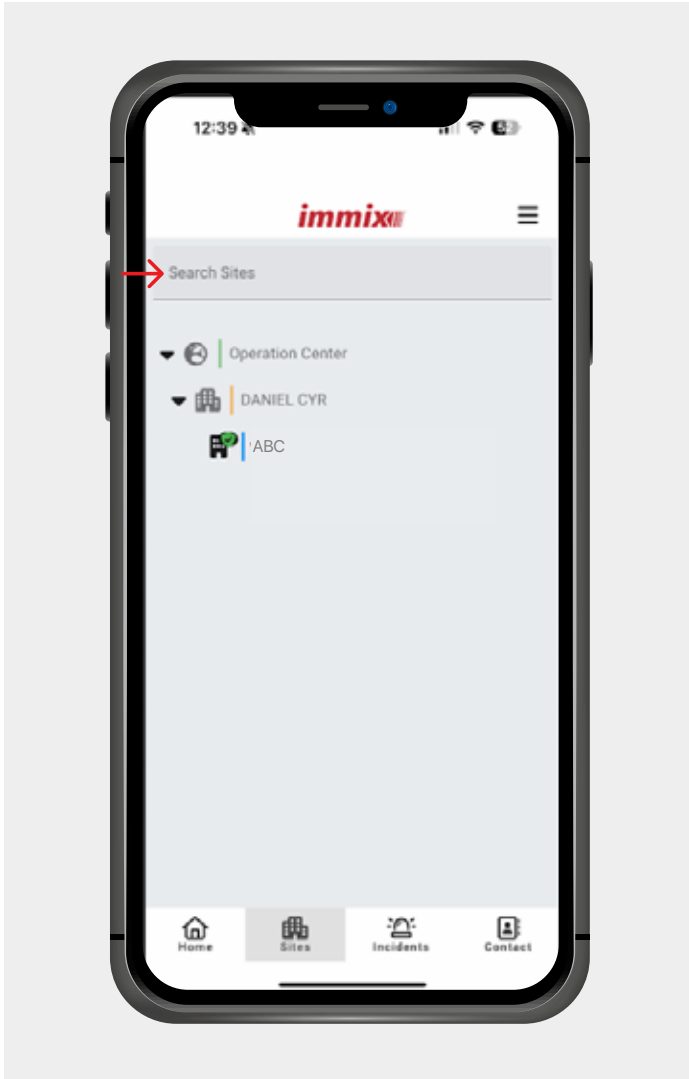


Step 7. In the “Sites” tab, you can easily use the search bar to type in and find the specific site you want to access.

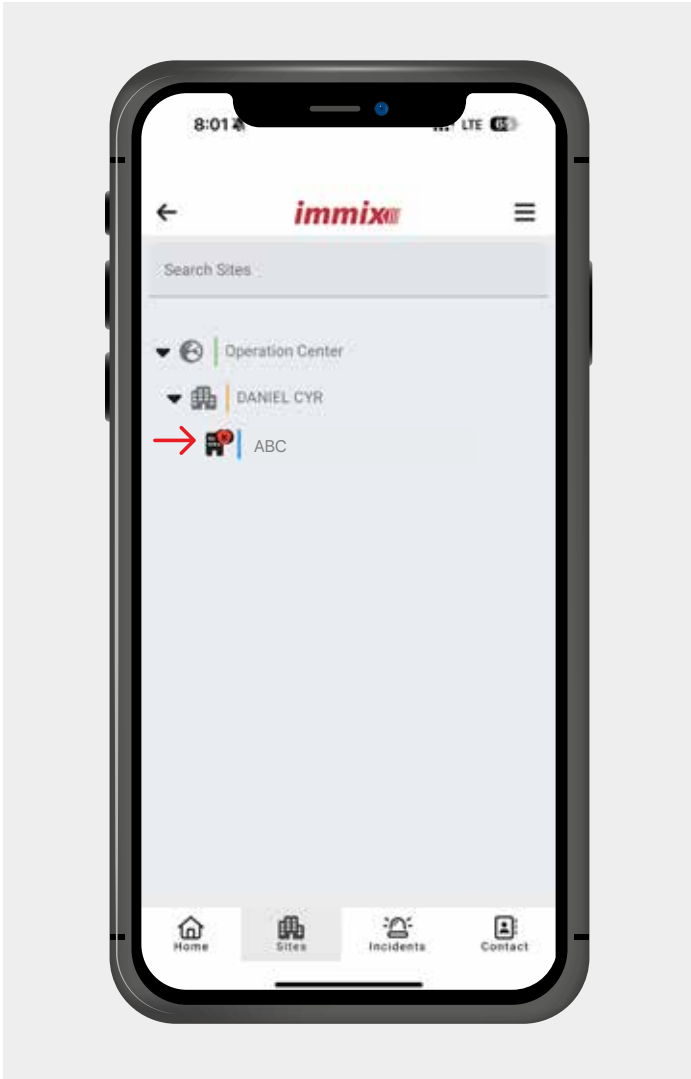


Step 7.1. A red shield with a cross next to the site name indicates that the site is disarmed.

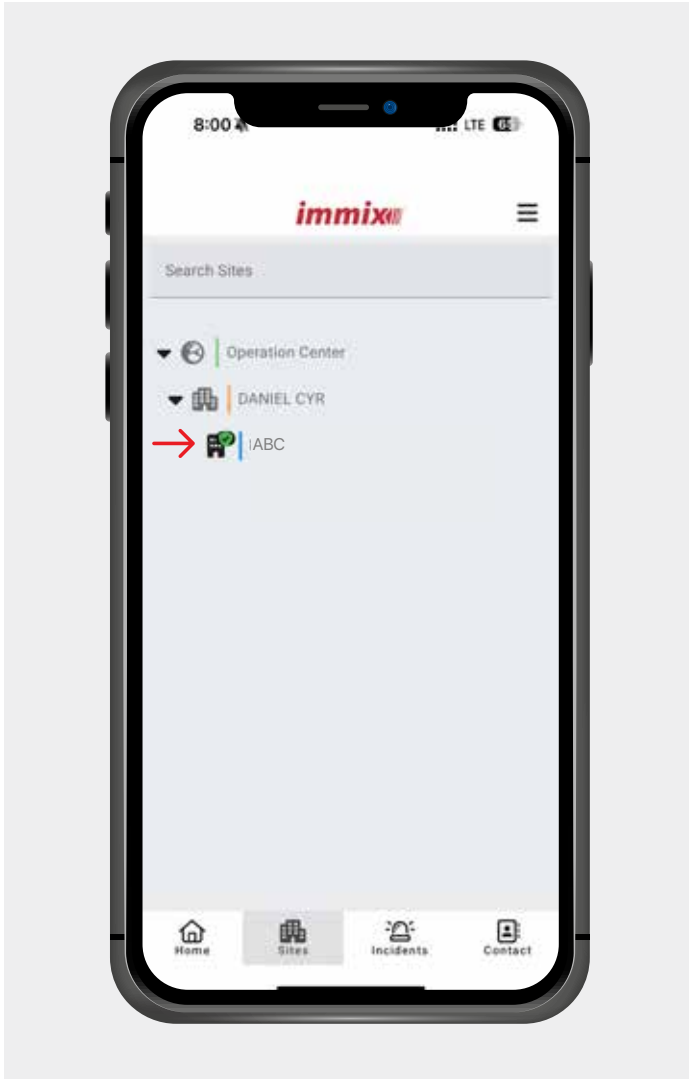


Step 7.2. A green shield with a check next to the site name indicates that the site is armed.

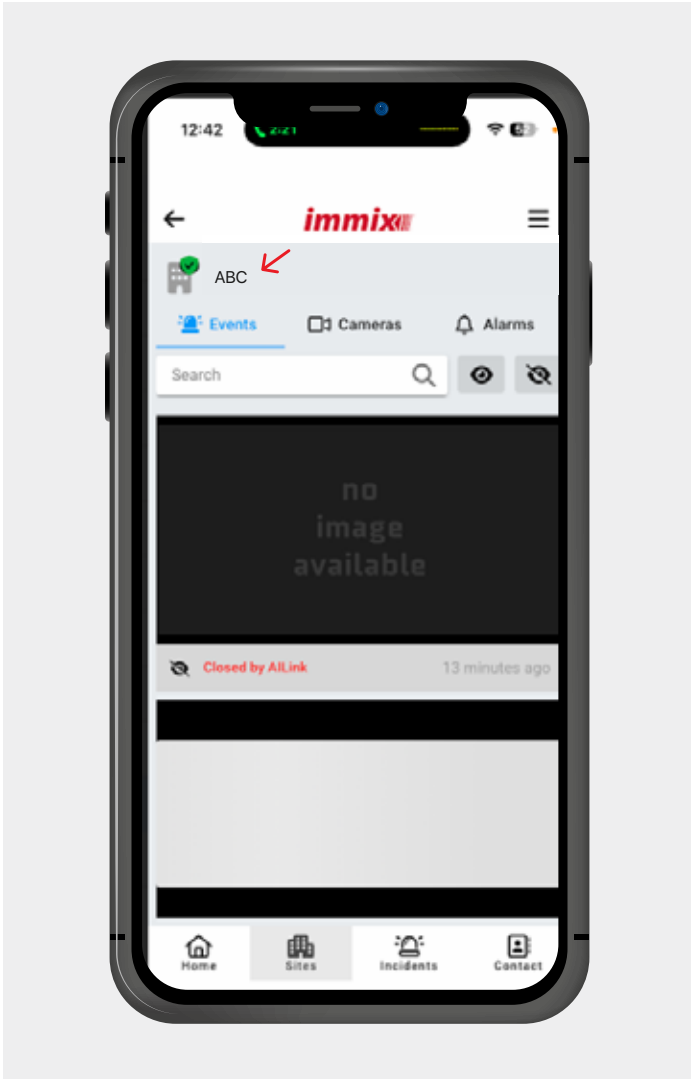


Step 8. Tap on the name of your site to access the option to arm/disarm.

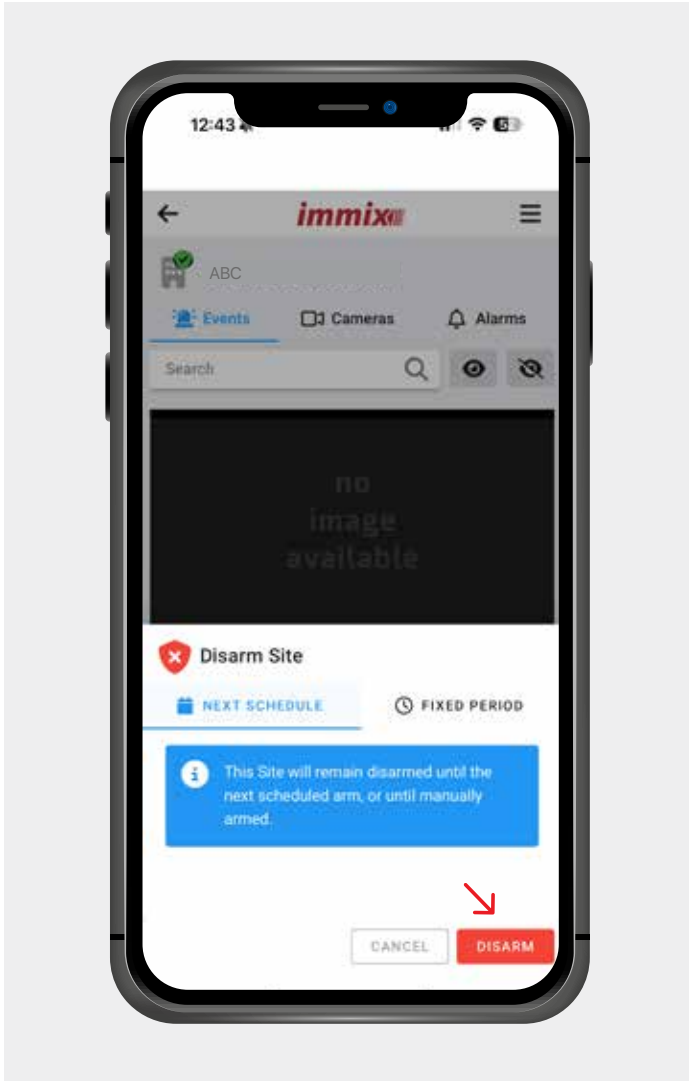


Step 9. To disarm the site, tap the "Disarm" button. Please note that the site will remain disarmed until the next scheduled arming time or until you manually arm it again.

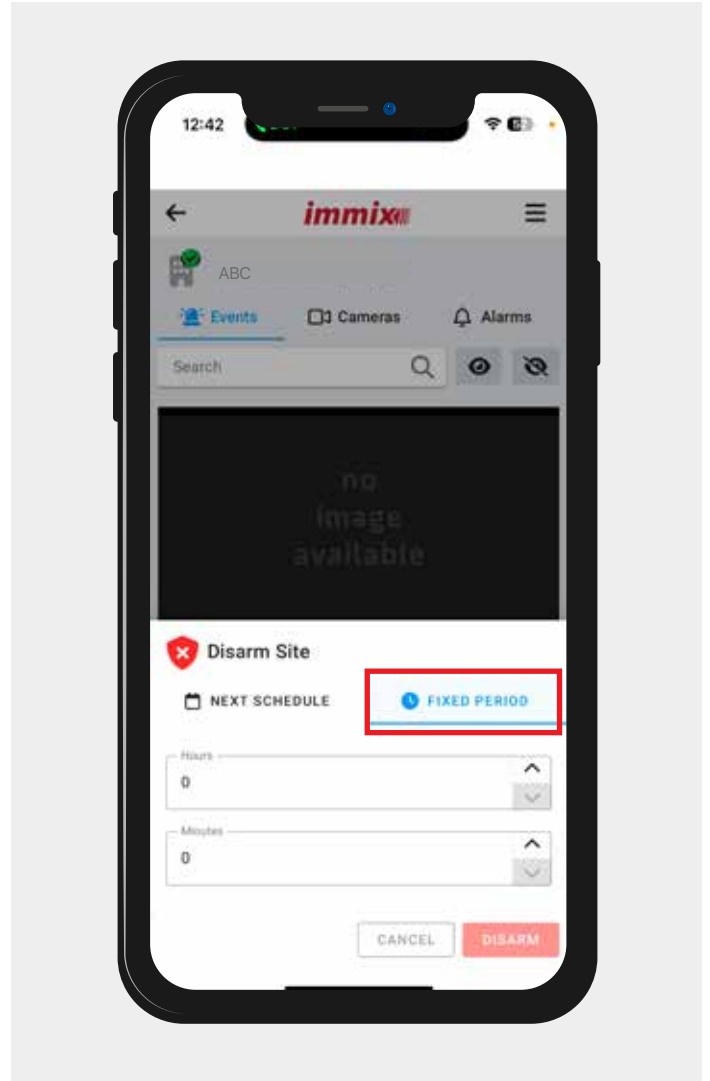


Step 10. To schedule an automatic rearm after a set time period, tap on "Fixed Period" and select the desired number of hours and/or minutes before the site automatically rearms.

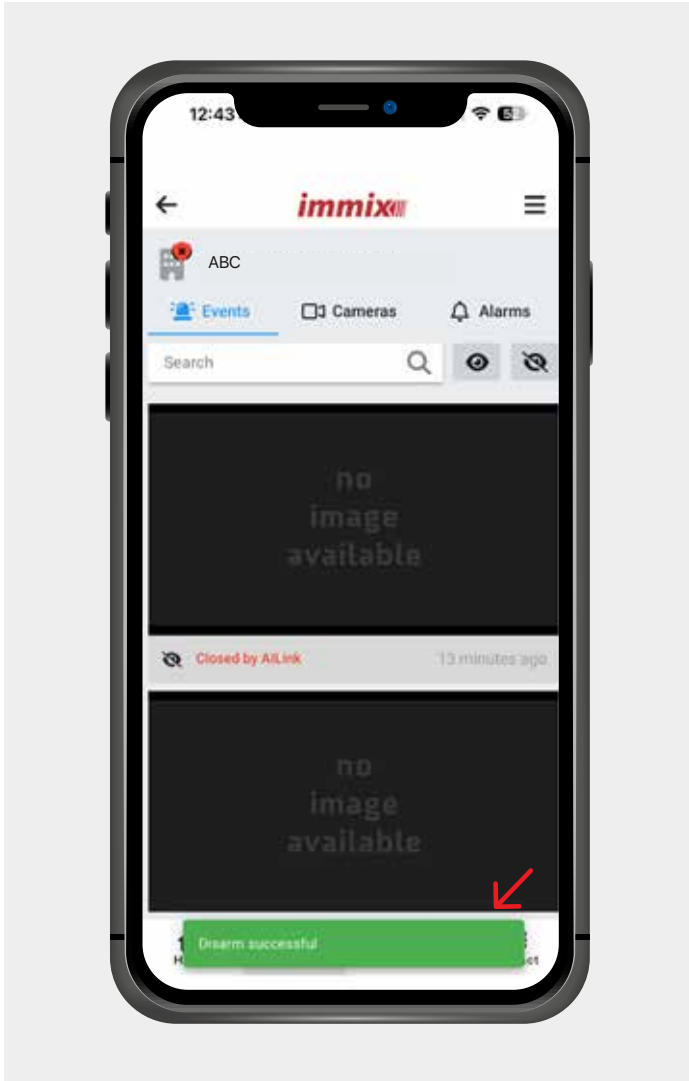

Step 11. After disarming, look for the "Disarm successful" notification in green to confirm that the site has been successfully disarmed.

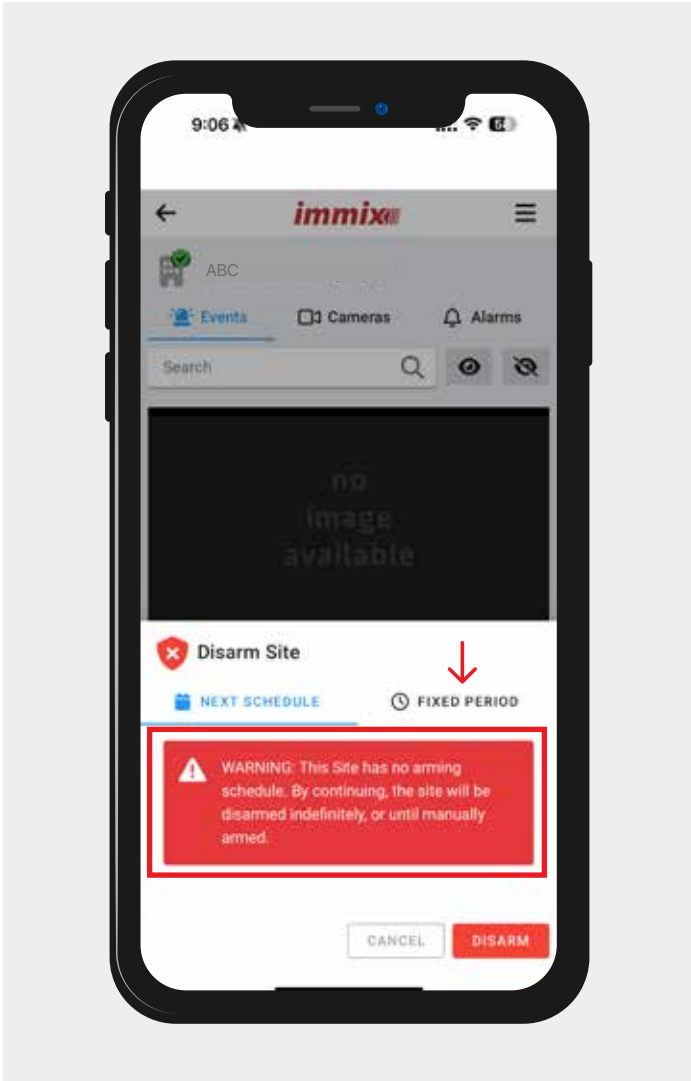

Important note. If the site lacks a preset schedule in Immix, a warning will be displayed indicating that the site will remain in its current state (armed or disarmed) indefinitely until manually changed. To avoid this, please use the "Fixed Period" option to ensure the site automatically reverts to its previous state after a specified duration.

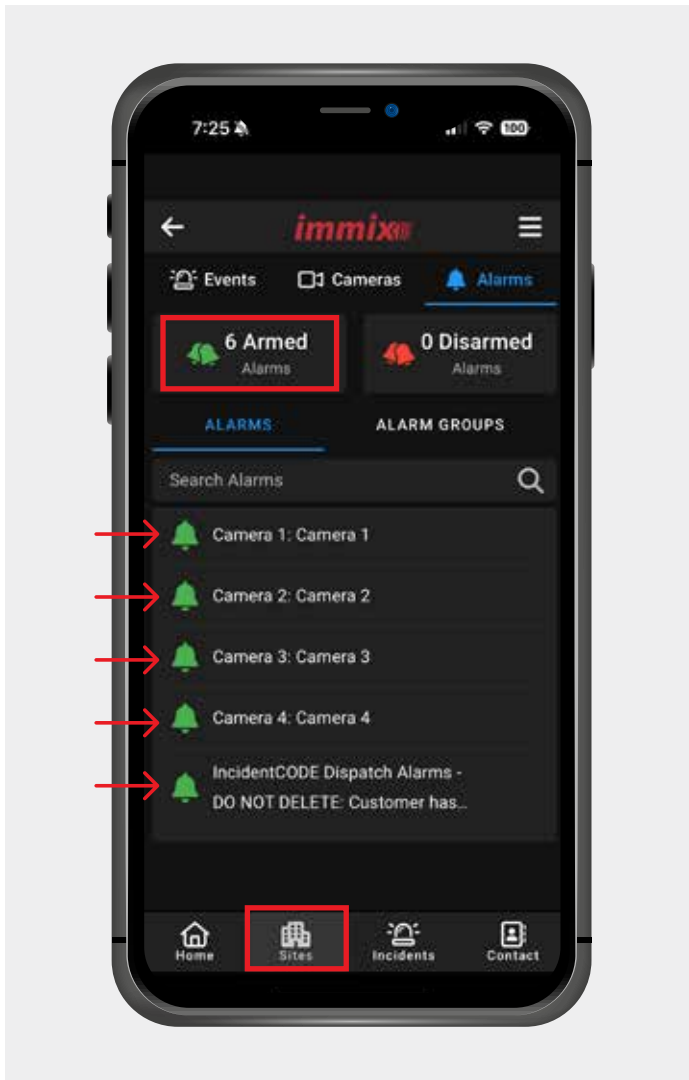

Never disarm cameras individually. Disarming cameras can compromise your site's protection. Ensure all cameras always remain armed.